

Filtrafine DJ-P Series Filter Housings

Virgin Polypropylene, Accepts Single Open End 222 O-rings Filter Cartridge

- Pure Virgin Polypropylene-No Talc, Fillers, Colorants, Plasticizers or Lubricants-Suited for High Purity Water Applications
- Models Available to Accept 10" or 20" Cartridges
- Accepts 222 O-rings Filter Cartridge-Excellent for Submicronic Applications
- All Materials are FDA Listed for Food and Beverage Contact
- Economical Alternative to Fluoropolymer Filter Housings
- Optional Mounting Bracket in Stainless Steel Material



Housing Specifications

Materials of Construction:

- Head/Bowl: Pure Virgin Polypropylene – No Talc, Fillers, Plasticizers, Lubricants
- Mounting Bracket: Stainless Steel
- Gaskets/O-rings: Standard: EPDM
Optional: Viton, Buna-N

Connections:

- Inlet/Outlet: DJP10: 3/4" (26.7mm) FNPT
DJP20: 3/4" (26.7mm), 1" (33.4mm) FNPT
- Vent/Gauge: 1/4" (13.7mm) NPT
- Drain: 1/4" (13.7mm) NPT

Performance Specifications



- Maximum Operating Pressure: 125 psig (8.6 bar) @77°F (25°C)

FDA Listed Materials:

Manufactured from Materials Which are FDA Listed for Food Contact Applications in Title 21 of the U.S. Code of Federal Regulations

Dimensional Data

Model	Liquid Flow Rate gpm (lpm)	Dimension Inches (mm)		Dry Weight lbs (kg)
		A	B	
DJ10P-3/4	to 10 (37.9lpm)	6.5" (165mm)	13.9" (354mm)	2.1 lbs (0.97 kg)
DJ20P-1	to 20 (75.7lpm)	6.5" (165mm)	23.7" (603mm)	3.2 lbs (1.47 kg)

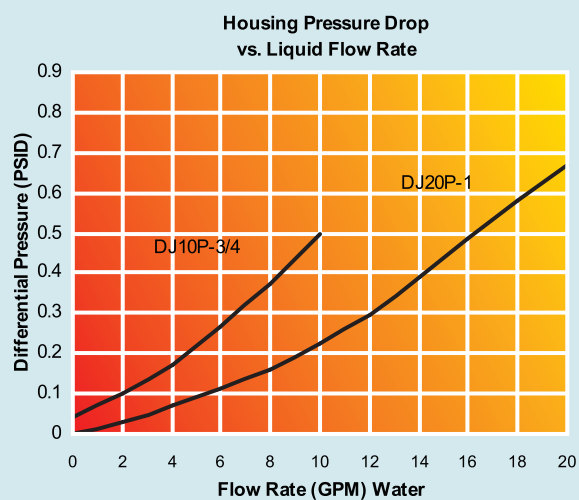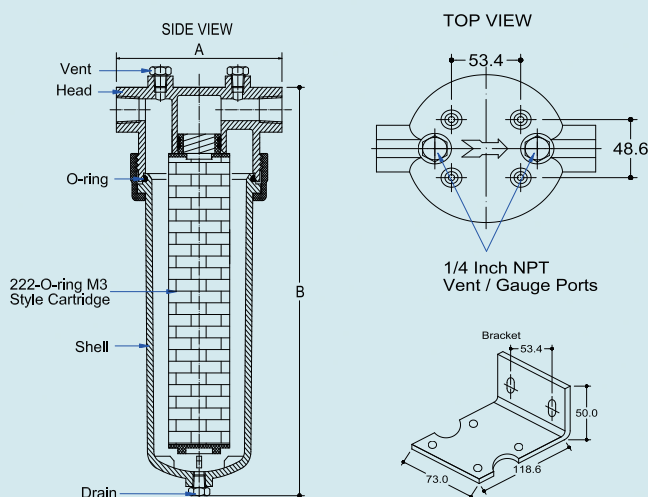

* For liquids other than water, multiply the pressure drop by the specific gravity of the fluid.

Ordering Information

DJ Product Name	10 Cartridge Length	P - Material of Construction	3/4 - Inlet / Outlet Connection Size	3 Cartridge Type
DJ	10 = 10" 20 = 20"	P = Polypropylene	3/4 = 3/4" 1 = 1"	3= Single Open End with 222 O-rings, Flat Closed End